

GATIC 2000

Loading Group Selector Guide

Loading Group Gatic B125

3 tonne wheel load – test load 125 kN

Footways, Pedestrian Areas, Car Parks, Driveways and Internal Floors.



Loading Group Gatic C250

5 tonne wheel load – test load 250 kN

For use in Roads carrying relatively slow moving traffic i.e., Minor Residential Roads, Cul-de-sacs, Pedestrian Precincts, Yards etc.


Loading Group Gatic D400

11.5 tonne wheel load – test load 400 kN

For use in Power Stations, Carriageways, Hard Shoulders and Parking Areas for all types of road vehicles. For high density traffic conditions we recommend the use of a vibration resistant locking system.




For Technical Advice
Tel +44 (0) 1304 203545
Fax +44 (0) 1304 215001
email acp@gaticdover.co.uk
www.gatic.com

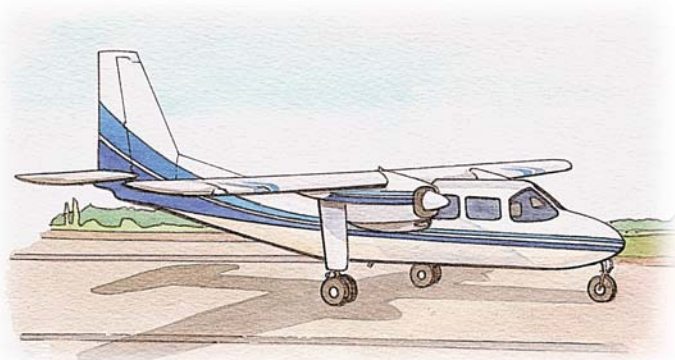

Loading Group Gatic E600

20 tonne slow moving wheel load –
test load 600 kN

Areas imposing high wheel loads, some
Airfield Pavements, Dockyards and other
areas where single slow moving wheel
loads up to 20 tonne may be encountered.

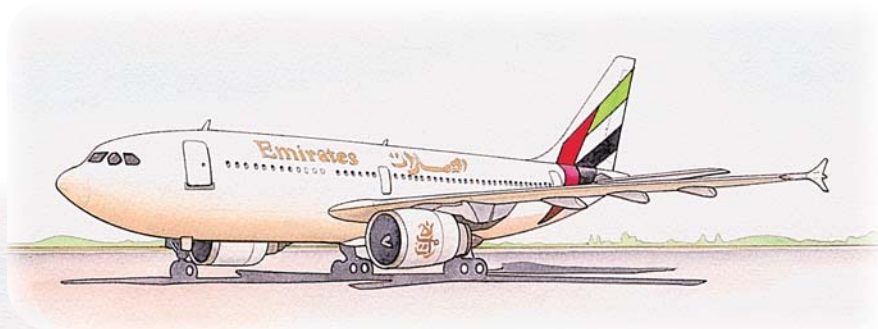

Loading Group Gatic F900

In excess of 20 tonne slow moving
wheel load – test load 900 kN

Areas imposing particularly high wheel
loads, Airfield Pavements and Taxiways
of Civil Airports, Container Ports and
Dockyards where single slow moving
wheel loads may exceed 20 tonne.

